


G730[®]

BUILT TOUGH FOR HEAVY LOADS

- ⚙️ Rugged die-cast aluminum housing ideal for heavier lawn tractors
- ⚙️ Durable 1 inch axle for heavier loads
- ⚙️ Efficient 10cc pump & 16cc motor
- ⚙️ Produces up to 230 ft/lbs of torque

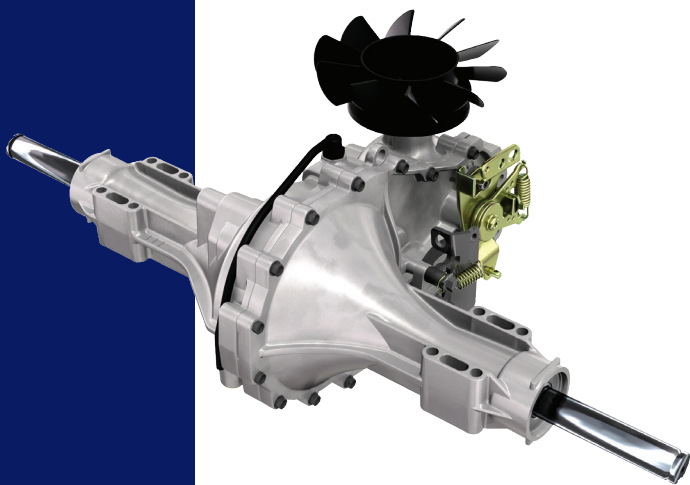

 **HYDRO-GEAR[®]**

DESIGNED & ASSEMBLED IN THE USA

EFFICIENT & RELIABLE

SPECIFICATIONS

Overall Transaxle Reduction	27.5:1
Pump Displacement	0.61 in ³ /rev [10 cc/rev]
Motor Displacement	0.97 in ³ /rev [16 cc/rev]
Charge Pump Displacement	0.11 in ³ /rev [1.9 cc/rev]
Input Speeds	
Max Hi-idle (No Load)	3600 rpm
Min (Loaded)	1800 rpm
Output Torque	
Continuous	230 lb-ft [312 Nm]
Intermittent	445 lb-ft [603 Nm]
Weight on Tires (per unit)	
Max w/ 20in Tires	770 lb [350 kg]
Max w/ 22in Tires	700 lb [318 kg]
Max w/ 23in Tires	665 lb [302 kg]
Axle Shaft Diameter	1.00 in [25.4 mm]
Weight of Unit	42 lbs [19 kg]

Specifications subject to change without notice



G730-09/2016-V1

**FOR MORE INFORMATION VISIT:
WWW.HYDRO-GEAR.COM**

