

Wireless commands with integrated interface

10

300

Wireless tiller head ezRTH/W

The multifunction tiller head ezRTH/W ensures a proper handling of equipment thanks to ergonomic shapes and well organised commands. The integrated wireless interface allows a simple and quick integration on rolling material. For a safe action, the command includes a stop button in case of dangerous manoeuvre. The interface remotely displays the battery level of the wheel and the system status.



Wireless interface ezR44IN/W

300

10

The wireless interface ezR44IN/W is used to remotely control on e or two wheels. It can be mounted on a chassis with fixing collars, or on a drilled panel with bolts. The motor control is ensured by a command connected to the wireless interface. The interface remotely displays the battery level of the wheel and the system status.



Commands connected to wireless interface

Tiller head ezATH

300

10

The ezATH command is a tiller head type control. It ensures a proper handling of equipment thanks to ergonomic shapes and well organised commands. It can control the speed in both directions, forward and backward. For a safe action, the command includes a stop button in case of dangerous manoeuvre.



Mini tiller head ezATHmini

300

10

The reduced space requirement tiller head ezATHmini perfectly fits small size trolleys and fully matches with operator's habits. Equipped with a stop belly button, it is suitable for a safe operation.



Throttle ezAV

300

10

The ezAV control is a throttle control, as commonly found on electric bikes or scooters. The ezAV can control the speed in a single direction. It fits a 22 mm diameter tube.




Joystick ezAAR

300

10

The ezAARxM is a finger size 1-axis joystick control. It can control the speed in both directions, forward and backward. It can be mounted on the end of a tube, or on a panel.

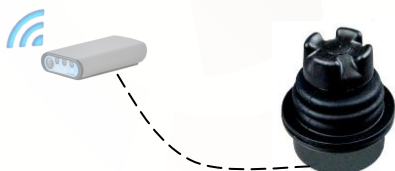

Accessories for integration

300

Fixed bracket ezMCF

The ezMCF fixed bracket facilitates the assembly of Series 300 wheels on rolling material (trucks, trolleys, handling tools...) The bracket is designed to immediately fit the wheel on any chassis.



300

Suspension bracket ezMCS

The ezMCS is a mounting bracket featuring a suspension for height compensation. The ground contact is optimal and the charge on the wheel stays stable, ensuring a good grip for the torque transmission.



10

300

Anti-rotate ring ezMAR

The ezMAR ring is used to block the rotation of the wheel's axis, ensuring the transmission of the motor torque to the chassis. The ezMAR is maintained on the chassis by two M6 bolts, and is tightened on the wheel's axis by one M3 bolt.



Chargers

Charger 1.8 amperes Mascot1A8

The Mascot1A8 charger can recharge one wheel in 5 hours. It is a high-efficiency 60W power supply, compliant with medical standards.

300




10

Charger 4 amperes Mascot4A

The Mascot4A charger can recharge one ezW10 wheel in 3 to 4 hours. It is a high-efficiency 150W power supply, suitable for indoor use only.

300

10

Wheel models	Series	References	Compatibility
	10"	ezW10R ezW10T ezW10G ezW10A	Check compatibility between accessories and wheels with the pictograms : 
	300	ezW300I ezW300M ezW300S	